

EVERSPRING PIR Detectors & Security Lighting

external combined PIR
180° sensor

(LY20-024-18) ES68 External PIR

Features

- Easy to install
- Built-in sensor prevents daytime operation
- Automatic and manual control modes
- Fully adjustable head
- Walk test facility
- Suitable for outdoor use



The ES68 combines a highly sensitive PIR with a tungsten filament lamp to produce a floodlight system for use in any commercial or domestic application. The PIR sensor automatically turns on the light once it detects the movement of heat. The light then switches off after a period of time (adjustable by the user).

ES73a Hi-Lo 180°

(LY20-026-20)



contemporary sensor light
Hi-Lo courtesy light

Features


- Offers all the benefits of a courtesy light combined with the deterrent of a security light
- Suitable for outdoor use
- Temperature compensation for constant detection range throughout the seasons
- Adjustable timer controls the amount of time the light switches on for

BULKHEAD LIGHT SERIES

- Compatible with Incandescent & Low energy bulbs

Specification

Current consumption	220/240V AC 50Hz
Lighting load	Max 60W (incandescent) Max 13W (low energy)
Weatherproof rating	IP44
Protection Class	Class 2
Operating temp	-20°C to +40°C
Bulb Connection	B22

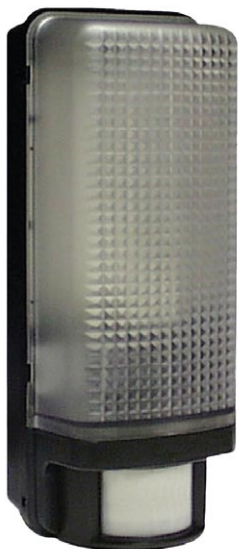

NL88
(LY20-020-14)

Indoor/Outdoor
Courtesy Light with PIR

• NL880 (LY20-014-16)
Economy Bulkhead Light

A stylish bulkhead light fitting which can be operated manually at any time through your existing internal light switch. A simple energy saving low light level luminaire.



• NL881 (LY20-015-17)
Dusk til Dawn Bulkhead Light

With a built-in dusk til dawn photocell the NL881 offers automatic low level illumination throughout the night. Automatically switches on at dusk and off at dawn.

Lyn teck

EVERSPRING PIR Detectors & Security Lighting

economic light control
Automatic Outdoor/Indoor Illumination

ES34 180° External PIR

Specification

AC voltage	220V-240V/50Hz
LIGHTING LOAD	
Incandescent	1100 watts
Fluorescent	N/A
Detection Range	up to 14m at 20°C
Detection Angle	180°
Adjustable Angle	180° vertical
Switch Function	Auto/off manual override
Mounting height	1.8 to 2.0m
Timer	5 secs to 12 min adjustable
LUX	turns light on day or night (bright/darkness) adjustable



Black LY20-023-17 White LY20-001-11

ES37 270° External PIR (LY20-003-13)

PIR wide angle light control
Corner Mount PIR Detector

Specification

AC voltage	220V-240V/50Hz
LIGHTING LOAD	
Incandescent	1100 watts
Fluorescent	500 watts
Detection Range	up to 14m at 20°C
Detection Angle	270°
Adjustable Angle	N/A
Switch Function	Auto/off manual override
Mounting height	1.8 to 2.0m
Timer	5 secs to 12 min adjustable
LUX	turns light on day or night (bright/darkness) adjustable



light control device
Automatic Outdoor Illumination
with high lighting load

(LY20-006-16) ES46 180° External PIR

Specification

AC voltage	220V-240V/50Hz
LIGHTING LOAD	
Incandescent	2200 watts
Fluorescent	500 watts
Detection Range	up to 14m at 20°C
Detection Angle	180°
Adjustable Angle	180° vertical
Switch Function	Auto/off
Mounting height	1.8 to 2.0m
Timer	5 secs to 12 min adjustable
LUX	turns light on day or night (bright/darkness) adjustable



Churchill Way, Nelson, Lancashire BB9 6RT email: sales@lynteck.co.uk
www.lynteck.co.uk Tel: 01282 717 490 Fax: 01282 698 020
Technical Support (Mon-Fri 9am-5pm): 0906 711 2329 (calls charged at 50p per minute)
Company policy is one of continuous improvement,
we reserve the right to change specification without prior notice.



Churchill Way, Nelson, Lancashire BB9 6RT email: sales@lynteck.co.uk
www.lynteck.co.uk Tel: 01282 717 490 Fax: 01282 698 020
Technical Support (Mon-Fri 9am-5pm): 0906 711 2329 (calls charged at 50p per minute)
Company policy is one of continuous improvement,
we reserve the right to change specification without prior notice.



EVERSPRING PIR Detectors & Security Lighting

global auto-lamp with PIR

Security Lighting for the front porch



(LY20-007-17) ES49 Globe light with PIR

Specification	
AC voltage	220V-240V/50Hz
LIGHTING LOAD	
Incandescent	max 200 watts
Fluorescent	N/A
Detection Range	up to 10m at 20°C
Detection Angle	180°
Adjustable Angle	22° vertical
Switch Function	Auto/off manual override
Mounting height	1.8 to 2.0m
Timer	5 secs to 12 min adjustable turns light on day or night
LUX	(bright/darkness) adjustable

ES42 500w Floodlight & PIR

Specification	
AC voltage	220V-240V/50Hz
LIGHTING LOAD	
Incandescent	max 500 watts
Fluorescent	N/A
Detection Range	up to 14m at 20°C
Detection Angle	110°
Adjustable Angle	detection and lighting
Switch Function	Auto/off manual override
Mounting height	2.13m to 2.74m
Timer	5 secs to 12 min adjustable turns light on day or night
LUX	(bright/darkness) adjustable

halogen light control Motion Sensor for Automatic Light Switching



BLACK LY20-004-14
WHITE LY20-013-15

convenient light control ceiling mountable wide angle sensor



(LY20-009-19) ES62 180° Twin Spot

Specification	
AC voltage	220V-240V/50Hz
LIGHTING LOAD	
Incandescent	max 300 watts
Fluorescent	N/A
Detection Range	up to 15m at 20°C
Detection Angle	180°
Adjustable Angle	detection and lighting
Switch Function	Auto/off manual override
Mounting height	1.8 to 2.0m
Timer	5 secs to 12 min adjustable turns light on day or night
LUX	(bright/darkness) adjustable

EVERSPRING PIR Detectors & Security Lighting

outdoor with light control Mini Halogen Light with Motion Sensor



BLACK LY20-010-12 WHITE LY20-011-13

ES65 150w Floodlight & PIR

Specification	
AC voltage	220V-240V/50Hz
LIGHTING LOAD	
Incandescent	max 250 watts
Fluorescent	N/A
Detection Range	up to 12m at 20°C
Detection Angle	110°
Adjustable Angle	detection and lighting
Switch Function	Auto/off manual override
Mounting height	1.8 to 2.0m
Timer	5 secs to 12 min adjustable turns light on day or night
LUX	(bright/darkness) adjustable

ES61 110° Lantern & PIR

Specification	
AC voltage	220V-240V/50Hz
LIGHTING LOAD	
Incandescent	100 watts
Fluorescent	N/A
Detection Range	up to 7m at 20°C
Detection Angle	110°
Adjustable Angle	N/A
Switch Function	Auto/off manual override
Mounting height	1.8 to 2.0m
Timer	3 secs to 12 min adjustable turns light on day or night
LUX	(bright/darkness) adjustable

Highly efficient period design lantern with PIR



BLACK LY20-012-14 BRASS LY20-008-18

sensor light with a contemporary design security lighting for the front porch



LY20-025-19

ES73 Sensor Light 180° Bulkhead

Specification	
AC voltage	220V-240V/50Hz
LIGHTING LOAD	
Incandescent	60 watts
Fluorescent	N/A
Detection Range	up to 12m at 20°C
Detection Angle	180°
Adjustable Angle	N/A
Switch Function	Auto/off manual override
Mounting height	1.5 to 2.0m
Timer	3 secs to 8 min adjustable turns light on day or night
LUX	(bright/darkness) adjustable



Churchill Way, Nelson, Lancashire BB9 6RT email: sales@lynteck.co.uk
www.lynteck.co.uk Tel: 01282 717 490 Fax: 01282 698 020
Technical Support (Mon-Fri 9am-5pm): 0906 711 2329 (calls charged at 50p per minute)
Company policy is one of continuous improvement, we reserve the right to change specification without prior notice.



Churchill Way, Nelson, Lancashire BB9 6RT email: sales@lynteck.co.uk
www.lynteck.co.uk Tel: 01282 717 490 Fax: 01282 698 020
Technical Support (Mon-Fri 9am-5pm): 0906 711 2329 (calls charged at 50p per minute)
Company policy is one of continuous improvement, we reserve the right to change specification without prior notice.

